




Authorised  
Distributor  
A ROCKWELL AUTOMATION PARTNER

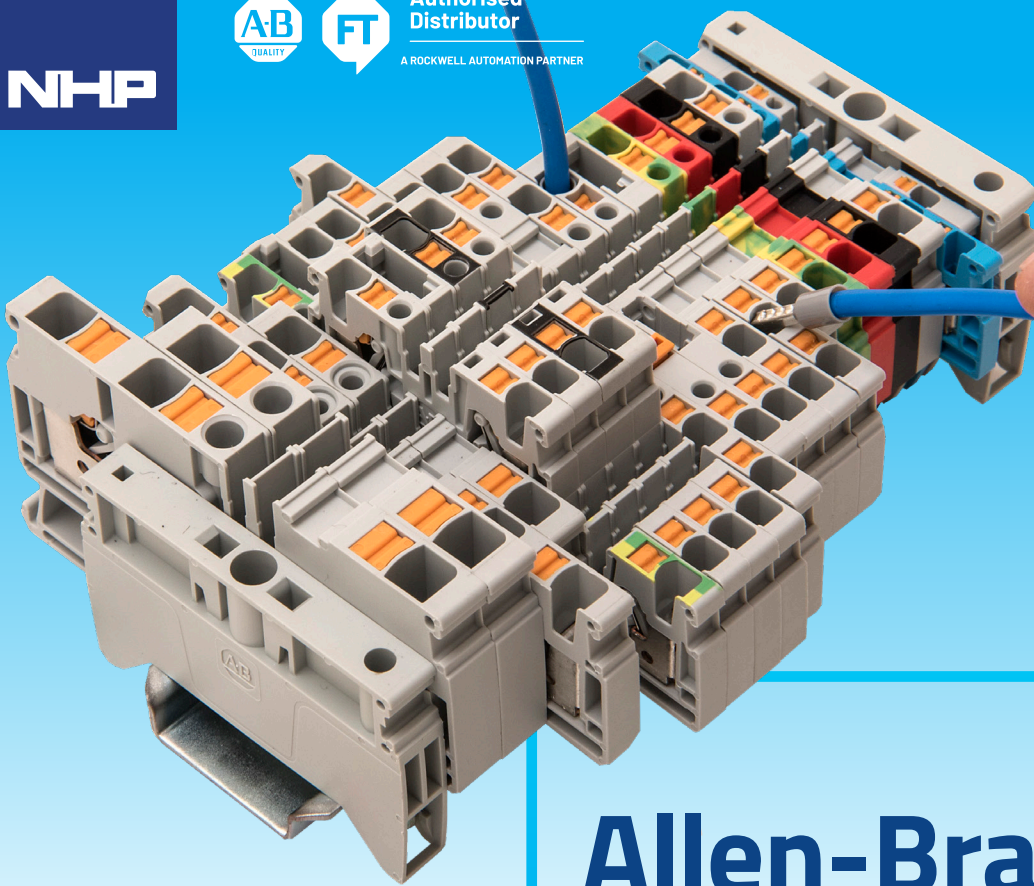

### Modern terminals that provide easy, quick, safe and reliable connections

- Effortless wire insertion and removal
- No strand breakage or turned back strands
- Test points for fast inspection, easy commissioning
- No requirement to retighten connection
- Plastic actuators for shock prevention
- Application specific designs
- Marking areas for easy identification and quick installation

# Allen-Bradley 1492-P Push-in Terminal Blocks



## Push-in Connection Technology

### Solid and ferrule:

Direct insertion  
without tools

### Stranded:

Press actuator to open  
clamp then insert wire

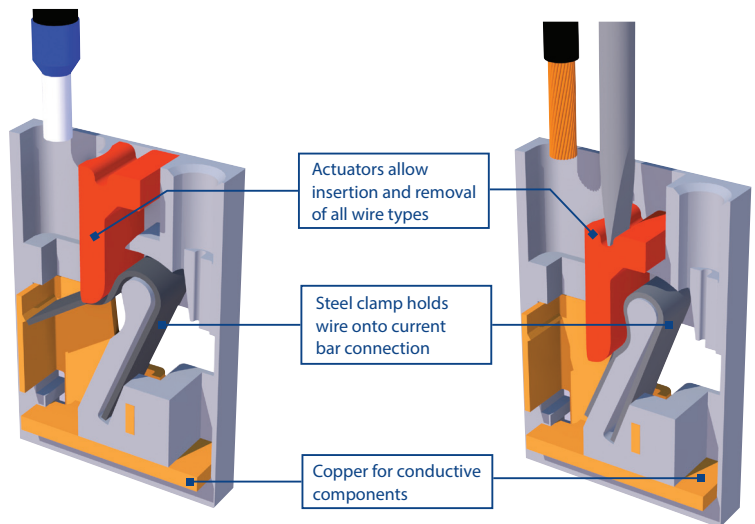

Easy verification testing with individual terminal test points.



Multiple distribution configurations available with two isolated jumper channels.



Compatible with Allen-Bradley ClearMultiPrint™, ClearPlot™ and ClearMark™ marking systems.



# Product Range

A wide range of product and accessories are available, with eight colours and accepting wire sizes from 1.5 to 16 mm<sup>2</sup>.

## Single Level Feed-Through

Colour <sup>1)</sup>	Colour						Catalogue Number <sup>2)</sup>			Wire Range (Rated Cross Section)	
	-B	-RE	-BL	-G	-Y	-OR	-W	2 Wire	3 Wire		4 Wire
								1492-P2	1492-P2T	1492-P2Q	1.5 mm <sup>2</sup>
								1492-P3	1492-P3T	1492-P3Q	2.5 mm <sup>2</sup>
								1492-P4	1492-P4T	1492-P4Q	4.0 mm <sup>2</sup>
								1492-P6	1492-P6T	–	6.0 mm <sup>2</sup>
								1492-P10	–	–	10.0 mm <sup>2</sup>
								–	1492-P10T	–	10.0 mm <sup>2</sup>
								1492-P16	–	–	16.0 mm <sup>2</sup>
								–	1492-P16T	–	16.0 mm <sup>2</sup>

## Multi-Level Feed-Through

Colour <sup>1)</sup>	Colour						Catalogue Number <sup>2)</sup>			Wire Range (Rated Cross Section)	
	-B	-RE	-BL	-G	-Y	-OR	-W	Double Level	Three Level		Four Level
								1492-PD3	–	–	2.5 mm <sup>2</sup>
								1492-PD3C <sup>3)</sup>	–	–	2.5 mm <sup>2</sup>
								–	1492-PT3	–	2.5 mm <sup>2</sup>
								–	1492-PT3C <sup>3)</sup>	–	2.5 mm <sup>2</sup>
								–	–	1492-PQ3 <sup>4)</sup>	2.5 mm <sup>2</sup>
								1492-PD4	–	–	4.0 mm <sup>2</sup>
								1492-PD4C <sup>3)</sup>	–	–	4.0 mm <sup>2</sup>

## Disconnect

Colour <sup>1)</sup>	Catalogue Number				Wire Range (Rated Cross Section)
	-B	2 Wire	3 Wire	4 Wire	
		1492-PKD3	1492-PKD3T	1492-PKD3Q	2.5 mm <sup>2</sup>
		1492-PKD4	–	–	4.0 mm <sup>2</sup>

## Flex Plug-in

Colour <sup>1)</sup>	Catalogue Number <sup>2)</sup>		Wire Range (Rated Cross Section)	
	-B	Single Level		Double Level
		1492-P31P	1492-PD32P	2.5 mm <sup>2</sup>
		–	1492-PD32PC <sup>3)</sup>	2.5 mm <sup>2</sup>

## Accessory Plug-in

Colour	Catalogue Number			Wire Range (Rated Cross Section)
	2 Wire	3 Wire	4 Wire	
	1492-P3P	1492-P3PT	1492-P3PQ	2.5 mm <sup>2</sup>

## Fuse

Colour	Catalogue Number					Wire Range (Rated Cross Section)
	Non-Indicating	With LED for Blown Fuse Indication				
Voltage rating	600V AC/DC	10...36V AC/DC	30...70V AC/DC	60...150V AC/DC	100...250V AC/DC	–
	1492-PFB4	1492-PFB424	1492-PFB448	1492-PFB4120	1492-PFB4250	4.0 mm <sup>2</sup>

### Notes:

- Available in grey as the standard colour. To order other colours add a suffix to the catalogue number. For example, the catalogue number would be 1492-P3-B for a blue 1492-P3 terminal block.
- Grounding terminal blocks available in all sizes. To order a grounding terminal block add a "G" to the catalogue number. For example, the catalogue number would be 1492-PG4Q for a grounding version of 1492-P4Q.
- The "C" in the catalogue number designates a commoning bar meaning the upper and lower circuits are connected.
- The 1492-PQ3 includes a single ground connection on the lowest level.

## Accessories



Centre Jumpers



Plug End Barrier



Plug Coding Element



Test Plugs



Plug Locking Element and Protective Cover



End Barriers



Plugs (Start, Middle, End)

nhp.com.au  
SALES 1300 NHP NHP  
sales@nhp.com.au

nhp-nz.com  
SALES 0800 NHP NHP  
sales@nhp-nz.com

NHP Electrical Engineering Products

A.B.N. 84 004 304 812

© COPYRIGHT NHP 2020

NHP9FLY 03/21